

VYNOX EVO ST-7505



HEAVY-DUTY BUTYL CHEMICAL PROTECTION ANTI-STATIC GLOVE

EN ISO 374-1 TYPE-A

Durable butyl construction provides reliable performance under extreme exposure to polar hydrocarbons, including ketones, acids, esters, and amine derivatives.

FEATURES

- **Enhanced Butyl Gloves** deliver sustained chemical resistance, abrasion protection, flexibility, and grip control during prolonged exposure to hazardous chemicals
- **SolvLock™** Solvent resistant polymer structure that maintains barrier stability under aggressive exposure
- **Permex™** Molecular resistance framework that slows chemical permeation through the glove structure
- **Textured Non-Slip Finish** delivers reliable grip in oily, greasy, acidic, and caustic conditions with enhanced mechanical and multi-hazard protection.
- **Durable Comfort Construction** resists material breakdown while maintaining comfort during extended wear
- **FlexFit™** Anatomical shaping engineered to follow natural hand movement for stable fit and controlled motion
- **Chemical Transfer Reduction** helps minimize chemical transfer during continuous liquid exposure tasks
- **Advanced Butyl Polymer** delivers maximum resistance to corrosive chemicals while maintaining structural integrity

STANDARDS



EN 388:2016 +A1:2018	EN ISO 374-1:2016 +A1:2018	EN 374-5:2016	EN 16350:2014	EN ISO 21420:2020 +A1:2024
2111X	ABILST TYPE A			CAT III 0075

MATERIALS

Coating:	Butyl
Length:	14"


SIZES



7	S
8	M
9	L
10	XL
11	2XL

PACKING DETAILS

1	Pair Per Polybag Retail Ready
72	Pairs Per Carton

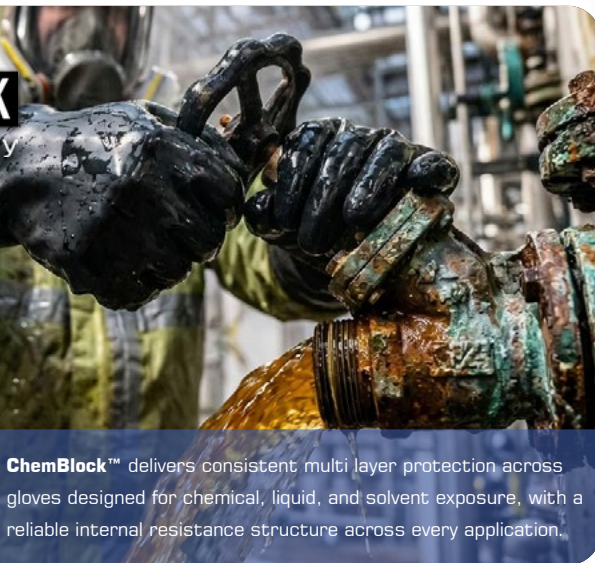

ChemBlock™ delivers consistent multi layer protection across gloves designed for chemical, liquid, and solvent exposure, with a reliable internal resistance structure across every application.

**CHEM
BLOCK**
Technology

**Core
Resist**


**Solv
lock**

Permex

ESSENTIAL TECHNOLOGIES



APPLICATIONS





HAND PROTECTION ENGINEERED. ACHIEVED.

ESSENTIAL
TECHNOLOGY

ST-7505 VYNOX EVO


**CHEM
BLOCK**
Technology




FlexFit™
Anatomical glove shaping
that follows the natural
curves & motion of the hand

2nd Layer:
Textured Grip Surface
Delivers Secure Handling
in Wet, Greasy and Oily
Environments

1st Layer:
Butyl Rubber Offers
Superior Protection
Against Corrosive
Chemicals

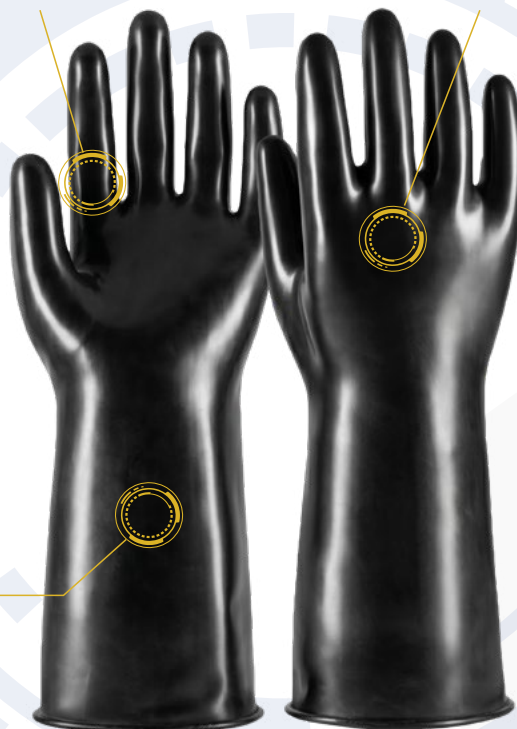

Straight Cuff
Provides Extended
Coverage and Added
Protection Against
Liquid Run-Off



**Core
Resist**

Fatigue-resistant
internal matrix that
maintains structure
under long exposure



**Solv
Lock**

Internal structure that
prevents collapse or
distortion under stress



Permex

Molecular barrier layer
that prevents toxic
ingress through glove
surface

ENGINEERED WITH STEGO TECHNOLOGIES

PERFORMANCE & COMPLIANCE ST-7505 meets the requirements of applicable EN & ANSI/ISEA standards.

EN ISO 21420:2020
+A1:2024



EN ISO 21420:2020 + A1:2024
General Requirements
Dexterity: 5

EN ISO 374-1:2016
+A1:2018



EN ISO 374-1:2016 + A1:2018
Protection Against Dangerous Chemicals
A - Methanol
B - Acetone
I - Ethyl Acetate
L - Sulphuric Acid (96%)
S - Hydrofluoric Acid (40%)
T - Formaldehyde (37%)

EN 374-5:2016



EN ISO 374-5:2016
Protection Against Micro-Organisms

EN 388:2016
+A1:2018



2111X

EN 388:2016 + A1:2018
Protection Against Mechanical Risks
Abrasion Resistance: 2
Blade Cut Resistance (Coupe Test): 1
Tear Resistance: 1
Puncture Resistance: 1
Cut Resistance (TDM 100 Test-ISO 13997): X

EN 16350:2014



EN 16350:2014
Electrostatic Properties
Vertical Electrical Resistance
(Tested to EN 1149-2)

PACKAGING INFORMATION	7 / S	8 / M	9 / L	10 / XL	11 / 2XL
MASTER CARTON DIMENSION	41X35X24 CM	41X35X24 CM	41X35X24 CM	41X35X24 CM	41X35X24 CM
NET WEIGHT	8.30 KG	8.60 KG	9.00 KG	9.40 KG	9.70 KG
GROSS WEIGHT	9.20 KG	9.60 KG	10.00 KG	10.40 KG	10.80 KG
CBM	0.035	0.035	0.035	0.035	0.035
HS CODE	40151910	40151910	40151910	40151910	40151910

Responsibly
Produced

Washable for
Extended Use Life

LIMITATION OF USE

Properly fitting safety gloves are crucial for safety. Poorly-fitting gloves cause irritation and hinder hand movements. Ensure they meet your required safety level and fit comfortably for optimal protection and functionality. The glove should not be worn in areas where there's a risk of entanglement or where there are moving parts. Avoid using gloves if there are signs of damage or defects.